


Heated power mirrors,

from September 1998

Deviate relay location and fuseplacements as well as the locations of multiple connectors see section component locations .

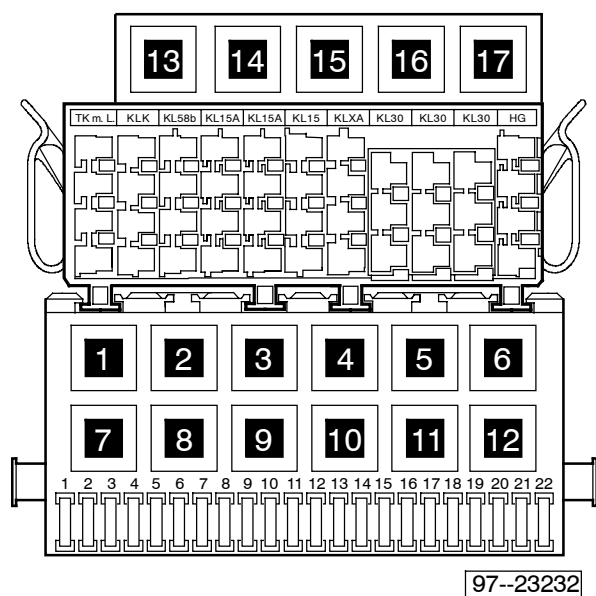


17 Load Reduction Relay II (53)

Note: Number in parentheses indicates production control number stamped on relay housing.

Fuse colors

- 30 A - green
- 25 A - white
- 20 A - yellow
- 15 A - blue
- 10 A - red
- 7,5 A - brown
- 5 A - beige
- 3 A - violet

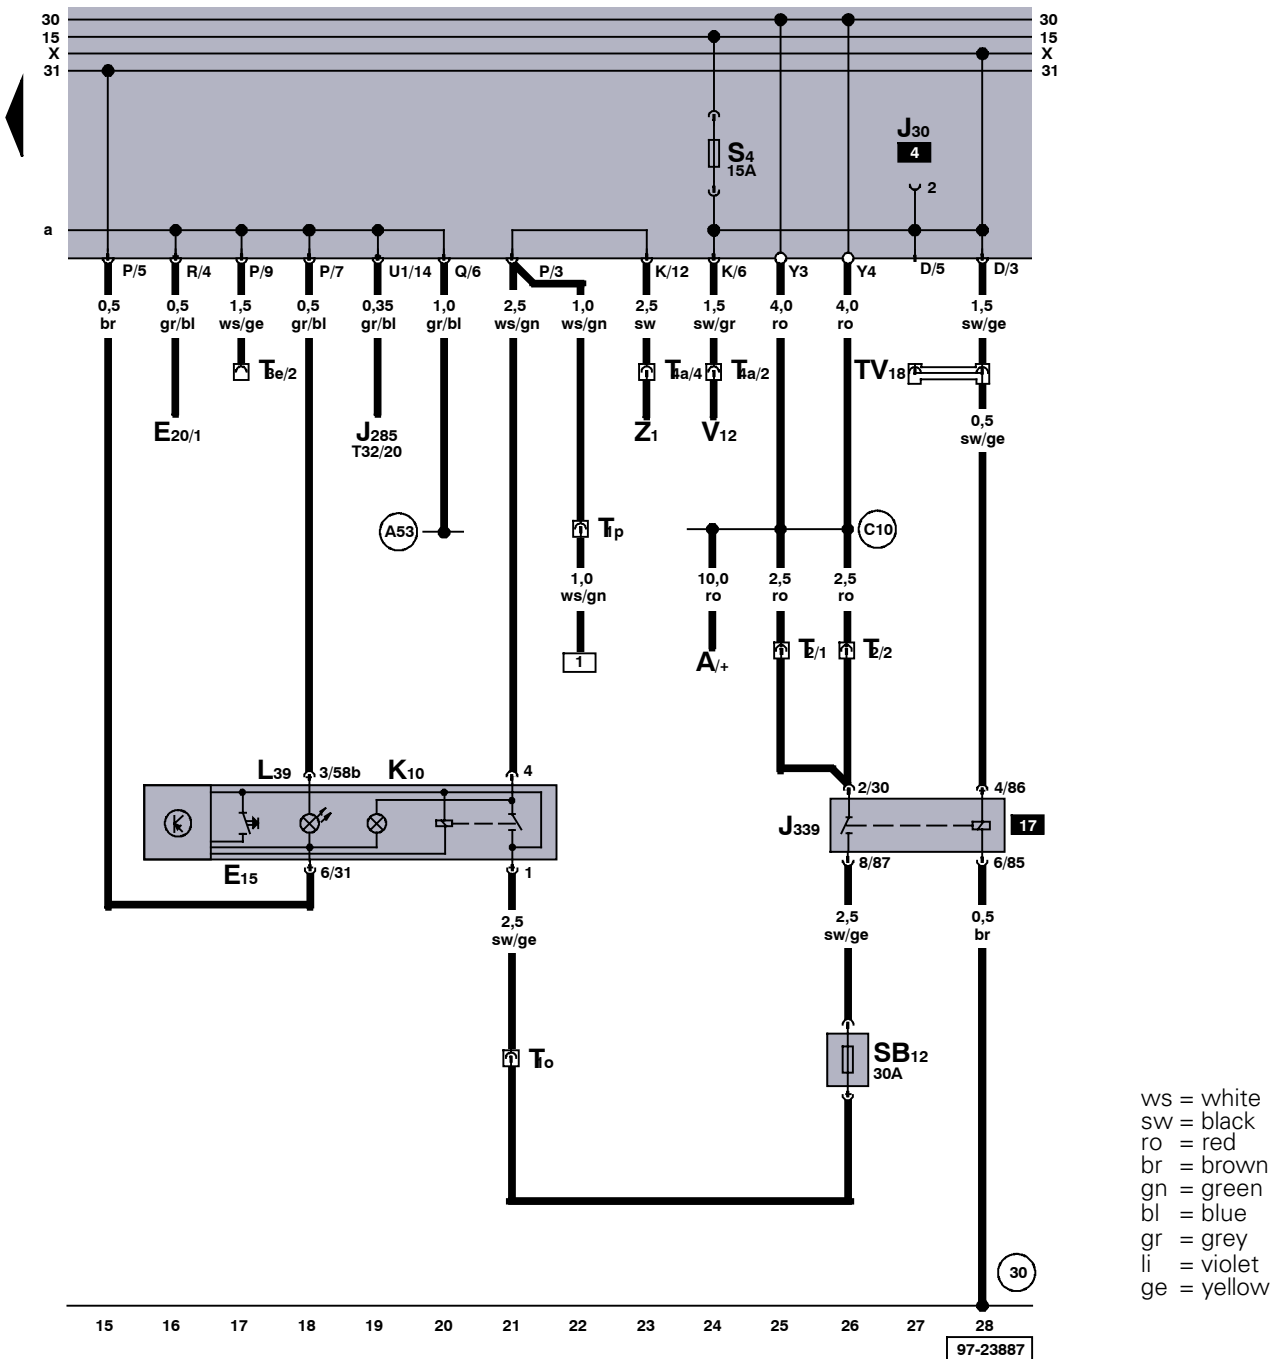

- A - Battery
- E15 - Rear Window Defogger Switch
- E20 - Instrument Panel Light Dimmer Switch
- J30 - Rear Window Wiper/Washer Relay
- J285 - Control module with indicator unit in instrument panel insert
- J339 - Load Reduction Relay II, above fuse/relay panel
- K10 - Rear Window Defogger Indicator Light
- L39 - Rear Window Defogger Switch Light
- SB12 - Fuse 12 in fuse holder, below fuse/relay panel
- T1o - Single Connector, behind fuse/relay panel
- T1p - Single Connector, behind fuse/relay panel
- T2 - Double Connector, behind fuse/relay panel
- T3e - 3-Pin Connector, behind fuse/relay panel
- T4a - 4-Pin Connector, near taillamp assembly
- T32 - 32-Pin Connector, blue, on instrument cluster

- TV18 - Terminal Xa Wire Connector, lilac
- V12 - Motor for rear windshield wiper
- Z1 - Rear Window Defogger/Heat Element

- (30) - Ground connection, -1-, next to fuse/relay panel
- (A53) - Plus connection (58b), in instrument panel wiring harness
- (C10) - Plus connection -1- (30), in headlight wiring harness